

# EX605 | BenQ Smart Projector



XGA | 4,000 Lumens

USB-A x 3 | USB Reader | HID Support | Android 9 | Wi-Fi

## Key Features

- **SmartEco:** A compact and light weight design that features a SmartEco mode which continually adapts the amount of lamp power used based on the content of each projected frame. EX605 also comes equipped with a pre-loaded Smart Dashboard app that calculates real-time cost savings.
- **Android 9 Built-in:** Engage students with interactive quizzes on Kahoot!, share assignments through Google Classroom, or access BenQ AMS for easy content management, all directly from Smart Projector itself.
- **Wireless Mirroring:** Supports Airplay, Miracast, Google casting and BenQ's InstaShare 2. The projector's mirroring settings also allow you to set priorities and preferences for mirrored devices.

## Summary


Introducing EX605, an Android-based smart projector designed specifically for education. This all-in-one 4,000-lumen high brightness smart projector eliminates the need for a separate PC, making digital learning more accessible than ever. Teachers and students can open apps directly on the BenQ EX605, easily accessing online resources in the classroom.




296 (W) x 120 (H) x 232 (D) mm

## What's in the Box

- Wi-Fi Dongle
- Power Cable
- Remote Control incl. AAA batteries
- QSG
- Warranty card

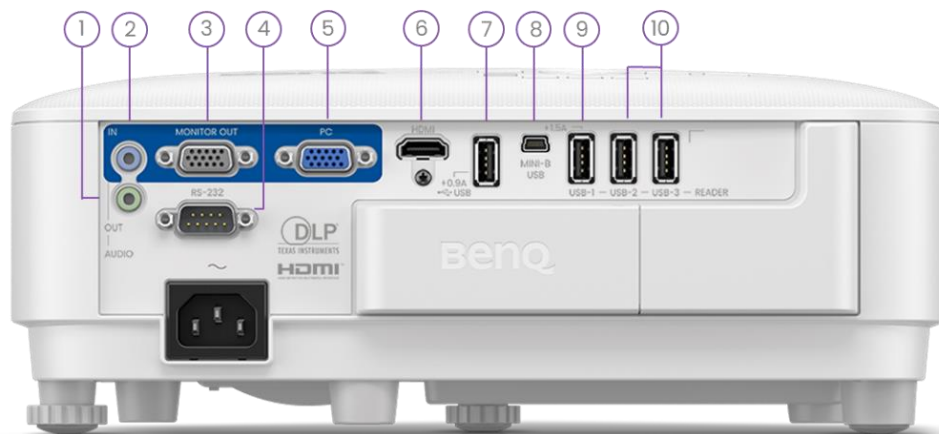

No.	Connectivity	Q'ty	Recommendations
1	Audio Out	x1	<ul style="list-style-type: none"> <li>• Connects to classroom speakers</li> <li>• Adjust the volume directly through the projector</li> </ul>
2	Audio In	x1	
3	Monitor Out	x1	
4	RS232	x1	
5	PC	x1	
6	HDMI 1.4	x1	Connects to input sources (e.g., laptop)
7	USB-A / 0.9A Power Delivery	x1	
8	USB Mini-B	x1	
9	USB-A / 1.5A Power Delivery	x1	For webcams, PM2.5 sensors, keyboards, mice, or USB drives
10	USB-A / 0.9A Power Delivery	x2	For keyboards, mice, or USB drives

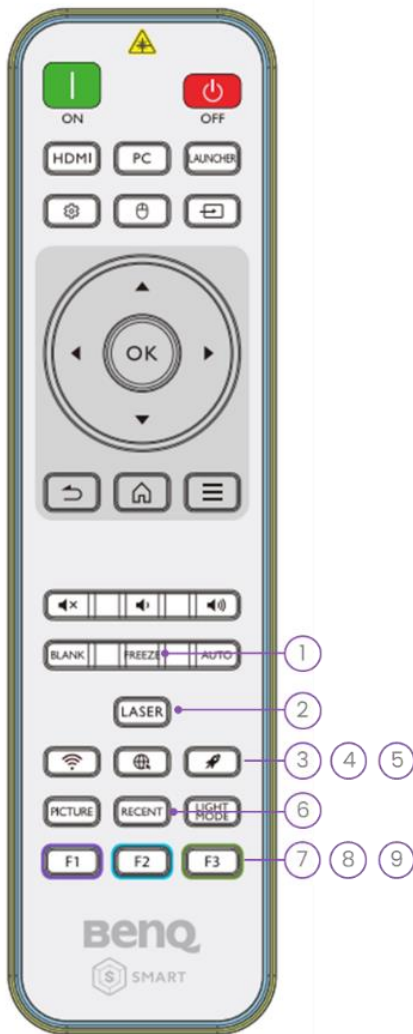

No.	Keypad	Description
1	Freeze	Teachers can simply freeze the screen, allowing students to take notes while working on personal tasks on the same computer.
2	Laser	Laser pointer
3	Wireless	Shortcut key for the Wi-Fi Settings menu
4	Browser	Shortcut key for the Firefox browser (or "Chromium" from Jul. via OTA)
	Clear	
5	Memory	Shortcut key for the Clear Memory function
	Cache	
6	Recent	Shortcut key for the Recently Used Apps menu
7	F1	Shortcut key for the Wireless Projection menu
8	F2	Shortcut key for the Video Conference menu
9	F3	Shortcut key for the File Manager app

## Specification

<b>BenQ SmartEco Projector</b>	
<b>Light Source</b>	Lamp
<b>Light Mode and Lifetime</b>	Normal: 6,000 hr.; SmartEco: 10,000hr.; LampSave: 15,000 hr.
<b>Product Dimension (W x H x D) (mm)</b>	296 (W) x 120 (H) x 232 (D)
<b>Net Weight (kg)</b>	2.6 +/- 200g
<b>Other Features</b>	SmartEco mode built-in, Smart Dashboard app preloaded
<b>Optical</b>	
<b>Brightness</b>	4,000 Lumen
<b>Resolution</b>	XGA
<b>Contrast</b>	20,000:1
<b>Native Aspect Ratio</b>	4:3 (compatible with 16:10, 16:9, 4:3, Auto, Real)
<b>Installation</b>	
<b>Throw Ratio</b>	1.96 – 2.15
<b>Corner Fit</b>	No
<b>Keystone Correction</b>	1D, Vertical ± 40 degrees
<b>Zoom</b>	Fixed
<b>Lens Shift</b>	No
<b>Connectivity</b>	
<b>USB-A 2.0</b>	x 3 (with power supply and reader capabilities)
<b>HDMI</b>	x 1
<b>RJ45 LAN control</b>	No
<b>Wireless (built-in)</b>	
<b>Screen Mirroring</b>	Driver Free Airplay & Miracast, Chromecast, InstaShare 2, Casting Permission, Do Not Disturb
<b>Split Screen</b>	4
<b>Others</b>	
<b>PC-Less</b>	Android 9 built-in; Browser and AMS Cloud Preloaded; Supports WPS Office, Slideshow; Keyboard/Mouse control
<b>ITS</b>	BenQ Device Management System (DMS Cloud), IAM User Account Management